



**XN72KF** PHOTOVOLTAIC MODULES

# XN72SERIES HALF-CUT PV MODULES


PEAK POWER: 580-590 Wp

## FEATURES INCLUDE:

- 144 half-cut N-type cells comprised by double layers of glasses.
- Positive power tolerance of 0~+3% improves system performance.
- Industry-leading module efficiency: maximum efficiency of 22.84%.
- Tested up to 5400Pa for maximum load resistance.
- Verified resistance against PID effects.
- Progressive Power Warranty guarantees 87.4% of rated power at 30 years.
- Manufactured globally with world-class quality standards


## QUALITY, RELIABILITY, AND KWH YIELD

MOTECH modules are powered by industry acknowledged high performance, reliable silicon cells. 25 years of experience in solar module engineering and design, along with rigorous durability and performance tests, ensure reliable lifetime performance and maximum kWh yield.

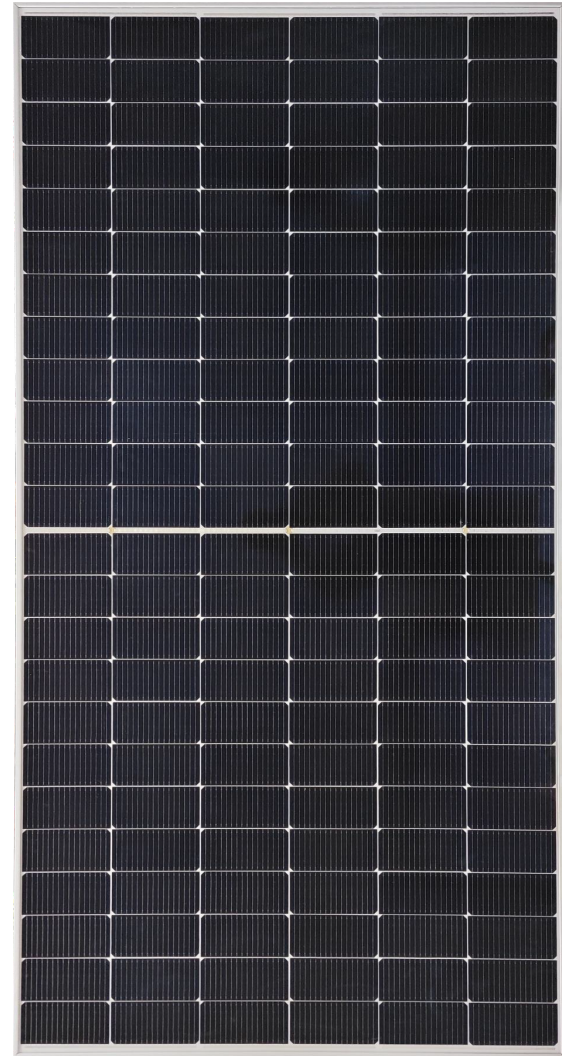

## 30-YEAR PROGRESSIVE WARRANTY\*

- 30-year progressive power warranty
- 12-year warranty on materials and workmanship

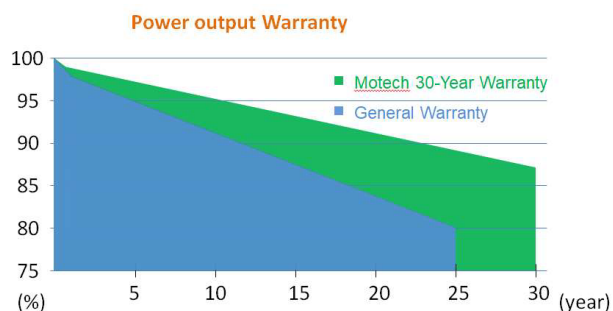


## CERTIFICATIONS & STANDARDS\*






## PHYSICAL CHARACTERISTICS

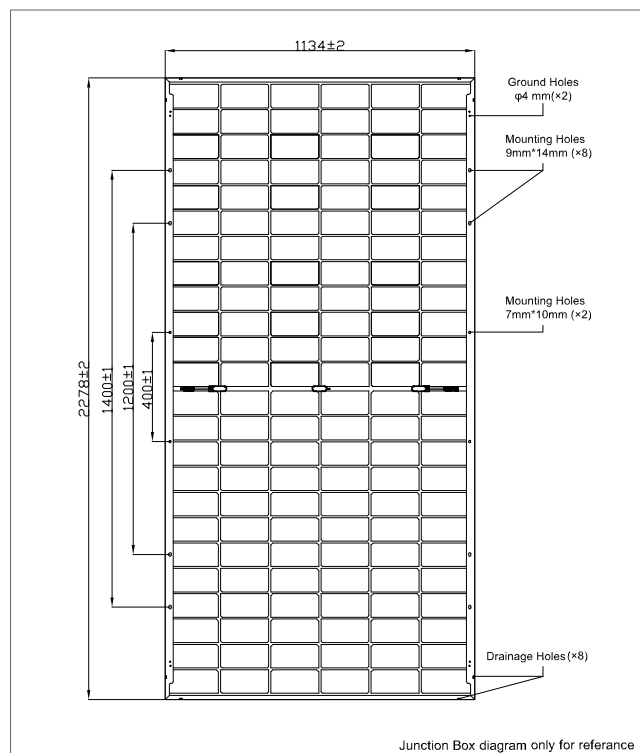

## PHYSICAL DESIGN PROPERTIES

Dimension	2278×1134×30mm
Weight	31.6 kg±5%
Front Glass	2.0 mm Semi-tempered Coated PV Glass
Back Glass	2.0 mm Glazed Glass
Junction Box	Protection class IP68
Output Cables	Φ4.0mm <sup>2</sup> , 300mm/300mm, or customized length
Connectors	MC4 Compatible
Packing	36 pcs/pallet, 720 pcs/container(40'HQ)

## IV CURVE

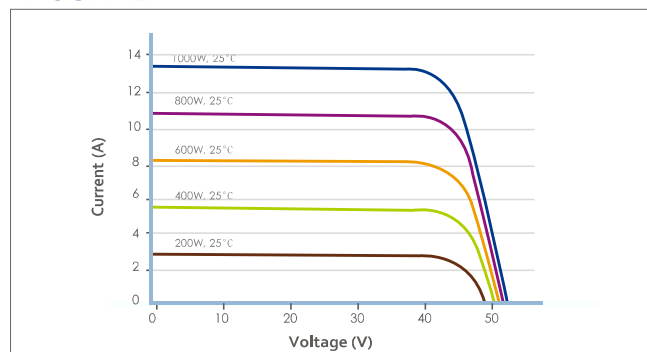

## ELECTRICAL PERFORMANCE

### XN72KF-580

### XN72KF-585

### XN72KF-590

Electrical Performance @ STC (Power Measurement Uncertainty±3%)			
Maximum Power Pmax[Wp]	580	585	590
Max. Power Voltage Vmpp(V)	45.15	45.39	45.65
Max. Power Current Impp(A)	12.85	12.89	12.93
Open Circuit Voltage Voc(V)	52.21	52.44	52.66
Short Circuit Current Isc(A)	13.52	13.56	13.59
Module Efficiency (%)	22.45%	22.65%	22.84%

Power Gain (Electrical Performance @ STC) (Power Measurement Uncertainty±3%)			
5%	Pmax[Wp]	609	614
	Module Efficiency (%)	23.57%	23.77%
15%	Pmax[Wp]	667	672
	Module Efficiency (%)	25.82%	26.01%
25%	Pmax[Wp]	725	731
	Module Efficiency (%)	28.07%	28.30%

## ELECTRICAL PERFORMANCE PARAMETERS

Isc Temperature Coefficient	α (%/°C)	+0.045	Maximum Series Fuse Rating	30A
Voc Temperature Coefficient	β (%/°C)	-0.25	Max. System Voltage (IEC)	1500V
Pmax Temperature Coefficient	γ (%/°C)	-0.29	Nominal Operating Cell Temp.(NOCT)	45°C ± 2°C

IV parameters are rated at Standard Test Conditions (Irradiance of 1000 W/m<sup>2</sup>, AM 1.5, cell temperature 25°C). All measurements are guaranteed at the laminate leads. NOCT is measured at 800 W/m<sup>2</sup>, 20°C ambient, and 1 m/s windspeed. Specifications are subject to change without notice.

Motech reserves the rights of final interpretation and revision on this datasheet.



Motech Industries, Inc. Solar Division  
Tainan Science Park I No.2, Dashun 9th Rd., Xinshi Dist., Tainan City, 74145, Taiwan  
Tel: +886-6-5050789 Fax: +886-6-5051789  
E-mail: modules@motech.com.tw

M31-2401-003-A

www.motechsolar.com